

Enbrighten LED Color-Changing Landscape Lights



Design Features

- Pairable long-range wireless remote controls multiple lights and all features
- Weatherproof for year-round permanent outdoor installations
- Flexible 10ft. spacing
- Burial-grade cable
- Multiple mounting options for up or down lighting
- Selectable white light in warm, soft, or day
- Any 2 color combinations and preset color and effect modes
- Dimmable
- This Jasco product is warrantied for 3 years with a limited-lifetime replacement warranty on Enbrighten LED light source only




	41012	41015	41017
Nominal Length of Light Set	72'	102'	132'
Color of Cord	Black		
Color of Puck Lights	Oil-Rubbed Bronze		
Number of Lights	6	9	12
Nominal Wattage	24W	36W	48W
Nominal Power Factor	0.87		
Operating Temperature	-20 °C ~ +50 °C		
Operating Humidity	10% - 90% RH		
Operating Voltage	120V		
Frequency	60Hz		
Number of Mounting Stakes	6	9	12
Distance from Power Plug to Controller	24'		
Distance from Controller to First Puck	20'		
Distance Between Pucks	10'		
Nominal CRI	83		
Nominal R9	19		
Nominal Lumens per Puck	150		
Nominal Efficacy	38 Lumens per Watt		
Lifetime	50,000 hour LED life		



continued...

	41012	41015	41017
CCT	2200 K		
Power Cord to Controller	2 Conductor 18 AWG - SJTW		
Low Voltage Direct Burial Cord	3 Conductor 18 AWG - Direct Burial		
RF Frequency (remote)	2.4 GHz		
RF Distance	100' In Open Air Applications		
Batteries	2 AAA batteries		
Estimated Yearly Energy Cost <small>(Based on 4 hours per day at \$0.11 per kwh)</small>	\$3.85	\$5.78	\$7.71

Multiple Mounting Options

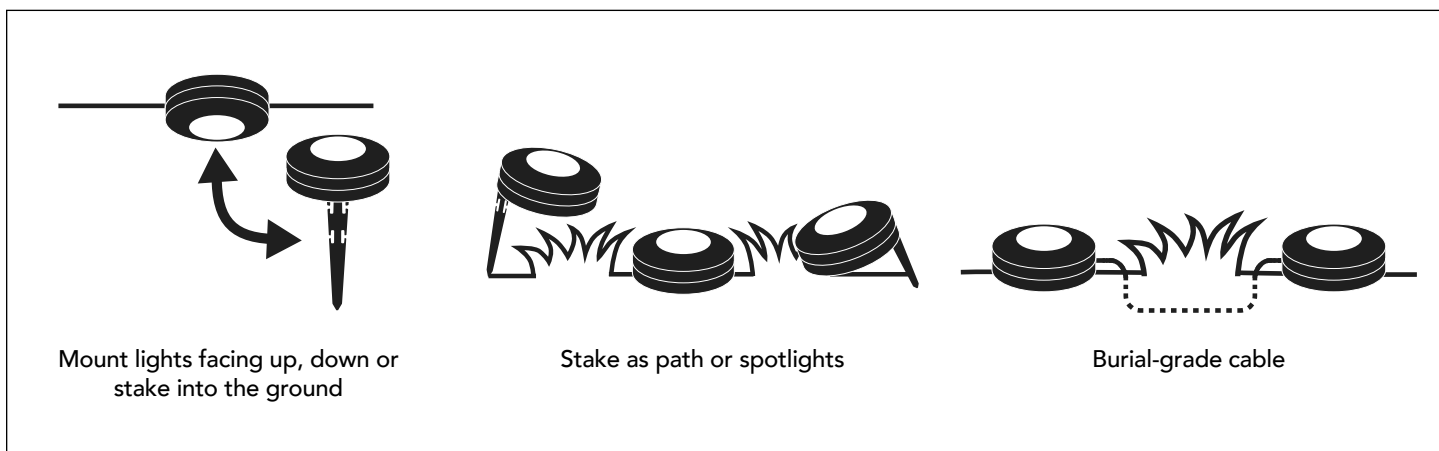


Ground Mounting

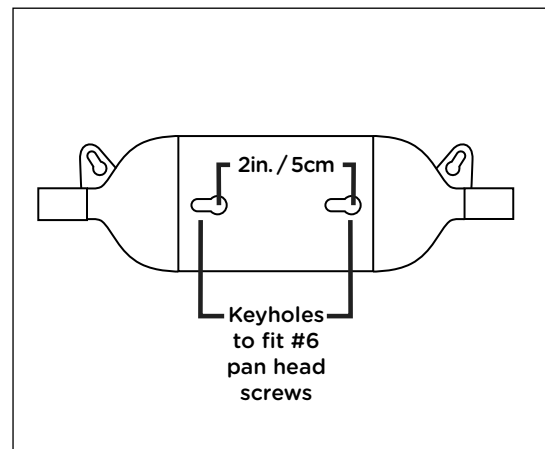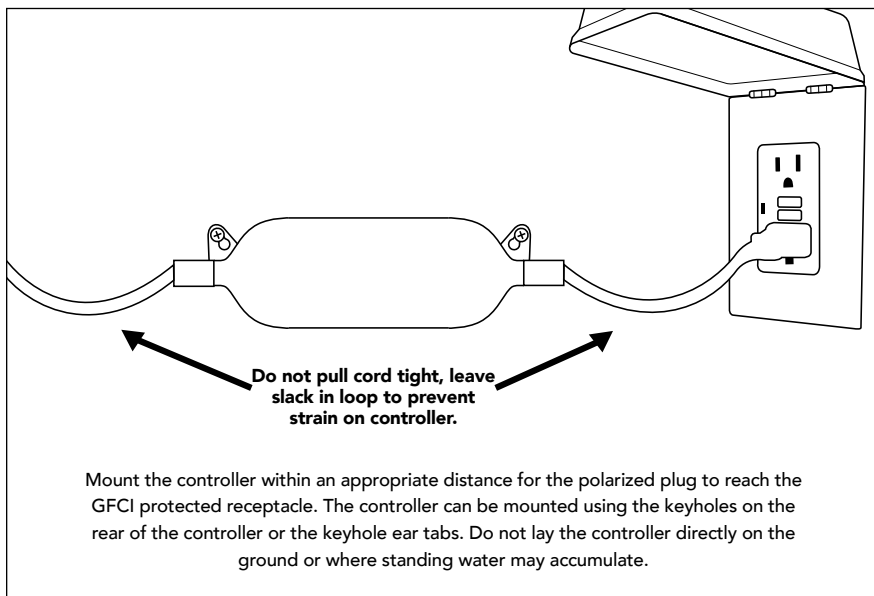


Flat-surface Mounting

Bottom View

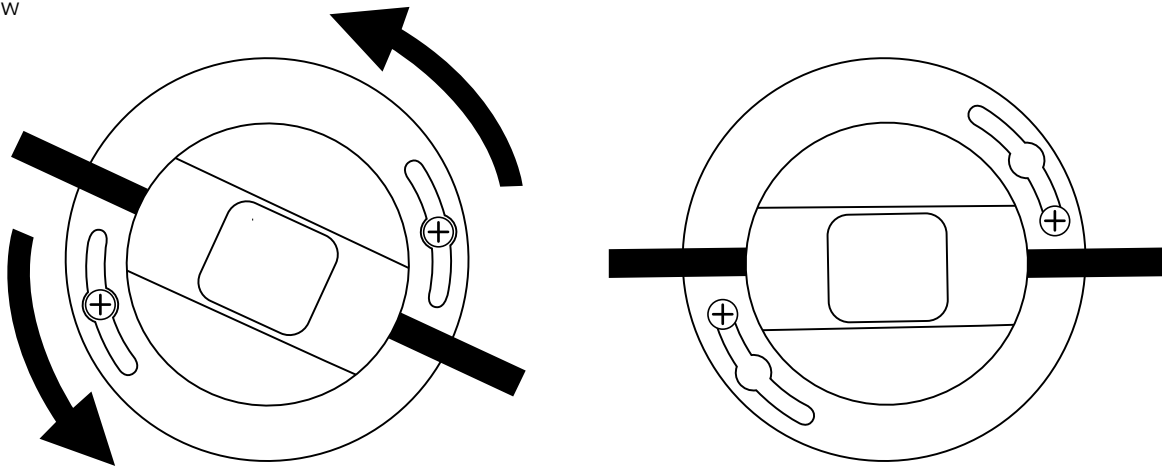

Lay out the landscape system in the manner in which you plan to install. Only mount lights to a solid support structure, such as joist, beams, studs or other solid mounting surfaces. Use two #6 pan head screws (not included) of an appropriate length for the surface to properly mount the lights. Use mounting template on the back of the manual for easy mounting.


Product Spacing

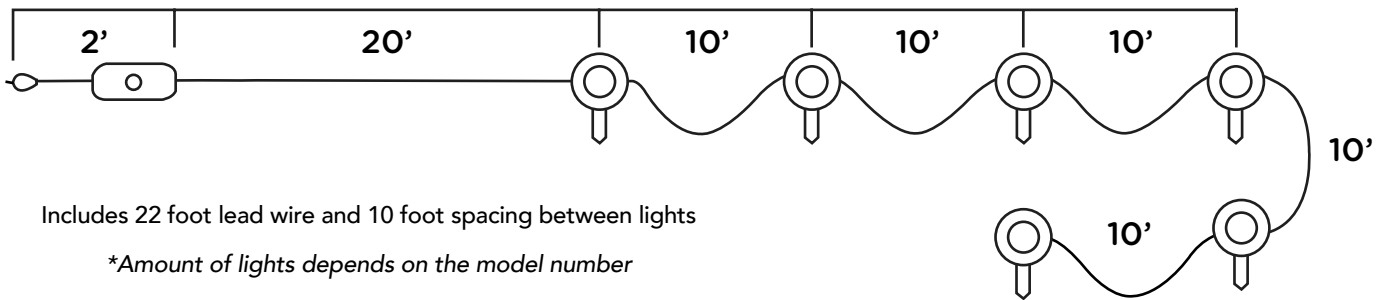

Includes 22 foot lead wire and 10 foot spacing between lights


**Amount of lights depends on the model number*

Flexible spacing up to 10ft.

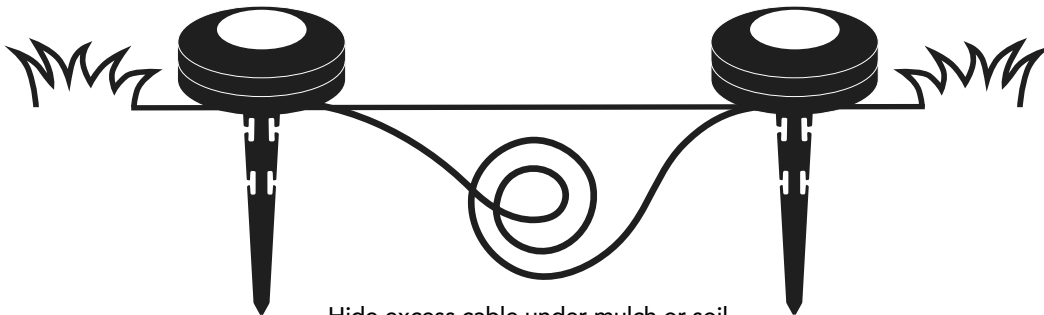

Hide excess cable under mulch or soil

Remote Features

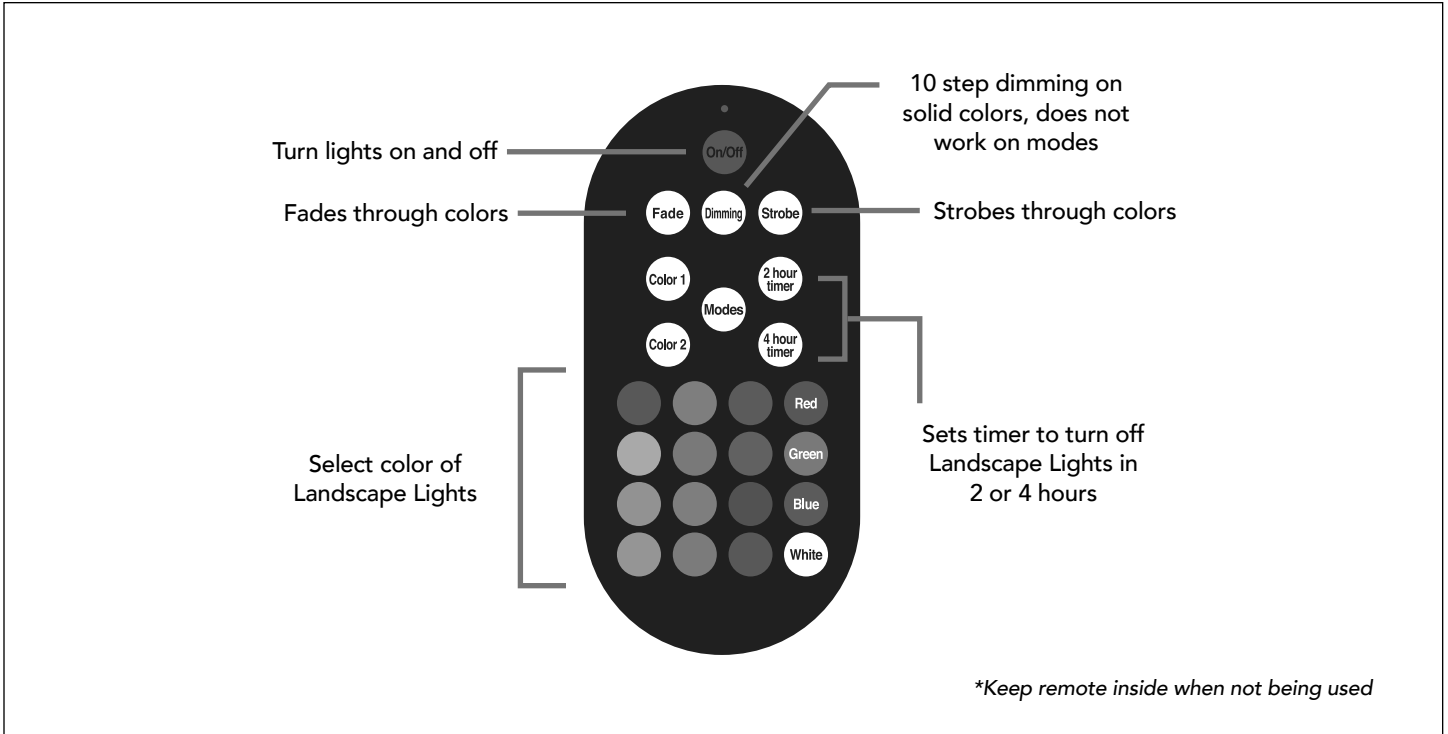

Related Products



26898
myTouchSmart
Outdoor/Indoor
Plug-in Timer



41431
myTouchSmart
In-Wall Digital
Timer



33861
myTouchSmart
Sunsmart™
In-wall Digital
Timer



14291
myTouchSmart
Outdoor/Indoor
Wi-fi Smart Plug



Additional Stakes
Visit enbrightenme.com
or call 1-800-654-8483