


GE Z-Wave In-wall Smart Switch

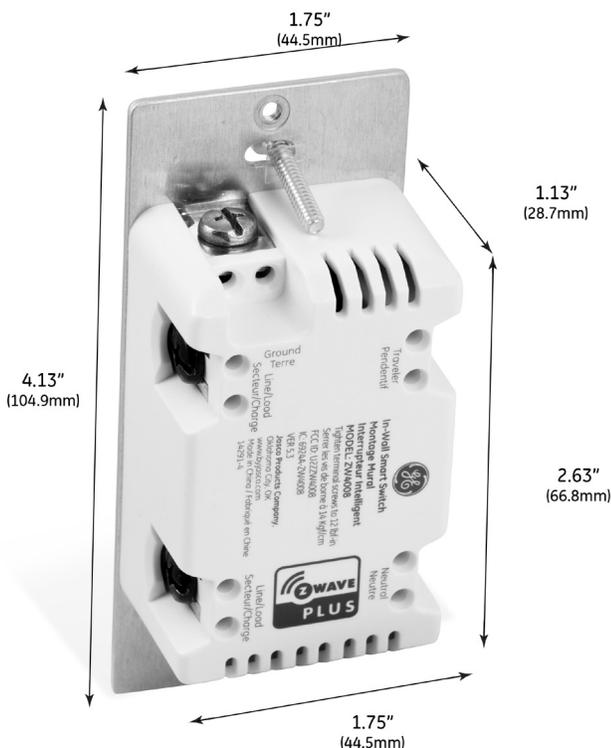

Specifications

- Power:** 120VAC, 60Hz
- Signal Frequency:** 908.4/916MHz
- Maximum Load:** 960W Incandescent, 1/2 HP Motor 1800W (15A Resistive)
- Range:** Up to 150 feet from controller or closest Z-Wave device
- Operating Temperature:** 32-104° F (0-40° C)
- Warranty:** 2-year limited product warranty

Requires neutral wire. Switch must be mounted indoors

Design Features

- QuickFit™ – Improved components reduce the housing depth by up to 20 percent compared to previous Z-Wave models and eliminated the need for heat tabs
- SimpleWire™ – Auto line-load sensing terminals support fast installation by detecting line and load wires and configuring the switch accordingly
- Dual ground ports, which are offset to avoid switch box mounting screws, support daisy-chaining in multi-switch setups
- Turn the connected device On/Off manually or via Z-Wave hub or controller
- Remotely monitor with any mobile device*
- Works with Google and Alexa (requires compatible hub*)
- May be used in single pole installation or with up to four GE model 12723 or 46199 Add-on switches in 3, 4, 5 or 6-way wiring configurations
- Works with all LED, CFL, halogen and incandescent bulbs
- Blue LED indicates switch location in a dark room (with 4 adjustable settings)
- Can be Included in multiple Groups and Scenes
- Utilizes the Z-Wave Firmware Update Meta Data command class for standardized firmware updates Over the Air
- Supports Advanced Configuration; LED status, Alternate exclusion
- Screw Terminal installation; requires wiring connections for Line (Hot), Load, Neutral, and Ground. Traveler wire required for multi pole installation

- Uses a standard decora wall plate (wall plate not included)
- Interchangeable Paddle switch: White & light almond paddle included in package
- LED status can be inverted manually changed to invert, always OFF and always ON
- In-line traveler circuit protection
- Z-Wave Plus Certified

Z-Wave Plus with S2 Security and SmartStart Features


- Improved battery life and up to 50 percent greater wireless range
- QR codes with unique, industry-standard secure key exchange to add a layer of 128-bit encryption
- Effortless device pairing to Z-Wave S2 and SmartStart certified gateways
- Backward compatible with all generations of Z-Wave devices
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home

White/light almond paddles included




* Requires Z-Wave hub or controller, functions may vary depending on brand.


Single Location Wiring

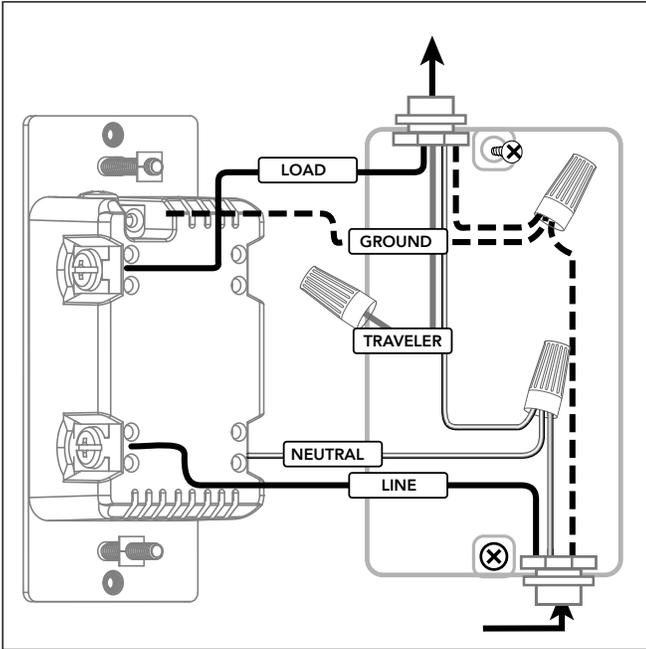

Space-Saving Screw Terminals

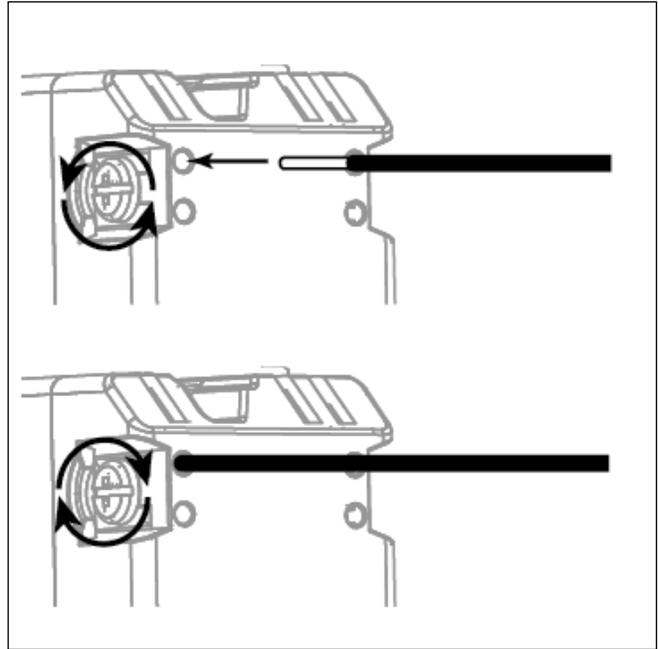

Multi-Location Wiring

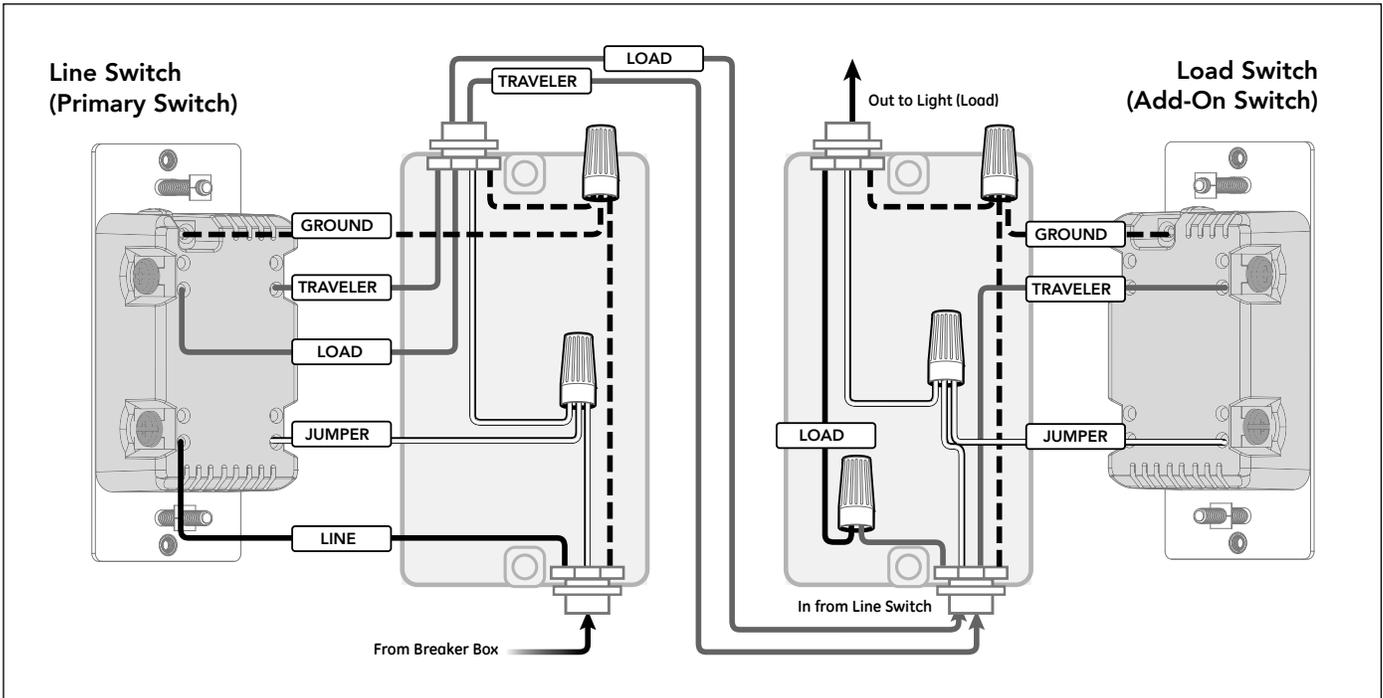

Installation Recommendations:

- Insert wire into port and tighten screw. Do not wrap wire around screw
- Indoor use only
- Visit <http://www.ezwave.com/hubs> for hub compatibility
- Wallplates sold separately
- Trilingual Instruction manual – (English, French, Spanish)

Device Configuration

Adding your device to a Z-Wave network


Once the hub is ready to add your smart switch, press and release the top or bottom button on the smart switch to add it in the network.

To remove and reset the device

Once the controller is ready to remove your device, press and release the top or bottom button on the smart switch to remove it from the network.

S2 + SmartStart install

The controller's app will indicate if it has discovered the device. If prompted by the controller to enter the S2 security code, refer to the QR code/security number on the side of the box, or the QR code label on the product. Enter the 5-digit code.



To return to factory defaults

Quickly press the ON button 3 times, then press the OFF button 3 times. The LED will flash ON/OFF 5 times when completed successfully.

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2019

Related Products - GE Z-Wave In-Wall Smart Controls



46199
Add-On
Switch



46203
In-Wall
Smart Dimmer



26931
In-Wall Smart
Motion Switch



26933
In-Wall Smart
Motion Dimmer



14288
In-Wall
Smart Outlet



14287
In-Wall Smart
Fan Control



14289
In-Wall
Touch Dimmer



14299
In-Wall 1000W
Smart Dimmer

Additional Paddle Colors



13940
Black Paddle



13943
Brown Paddle



13945
Ivory Paddle